


LIGHTING ELEMENT TECHNICAL CARD

Description: Fixture complete with a high efficiency LED light source (25W power) with a nominal luminous flux of 2500 lm (3000 K). Structure made from steel. Extruded epoxy polyester powder coated aluminium profile 17x14x1000 mm equipped with a stripled (280 LED), an opal polycarbonate diffuser and a driver. Its degree of protection against the penetration of dust, solid objects and liquids is IP40.

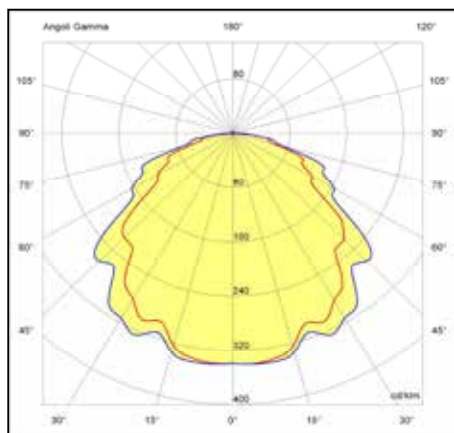

Luminaire details

Supply voltage	100-240Vdc
Driver 24Vdc	included
Insulation class	CL I
IP number	IP40
Glow wire	850° C
Impact test	IK04
European standards	EN60598-2-1
	EN62471:2008, EN60825-1
Photobiological risk	RG0

Lamp details

Lamp	LED
Type	Strip
CRI	>90
CCT	3000 K
SDCM	3
Luminous flux @65°C	2500lm
Power supply	24V
IEE	A+



Deze informatie is afkomstig van de website van Zero-Z design / Akoestiekexpert.nl.

Voor vragen, toelichting en meer informatie kunt u contact opnemen met:

Zero-Z design

Jasmijnstraat 6a	Modem 20b
3732 EC De Bilt	7741 MJ Coevorden

T +31 (0)30 2201297

F +31 (0)30 2210692

E info@zero-z-design.nl

W www.zero-z-design.nl

www.akoestiekexpert.nl

