


SNOWSOUND DIVISION

LIGHTING ELEMENTS TECHNICAL CARD

Description: Fixture made from epoxy powder coated steel and equipped with one driver. Suitable for housing one recessed light provided with a high efficiency LED light source with nominal flux 1440 lm (3000 K). Electrical cable length 390 cm included. Its degree of protection against the penetration of dust, solid objects and liquids is IP43.

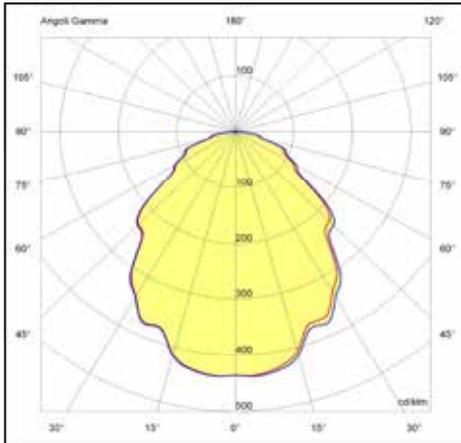

Luminaire details

Supply voltage	220-240V 50-60Hz
Driver 280mA	included
Insulation class	CL I
IP number	IP43
Glow wire	850° C
Impact test	IK03
European standards	EN60598-2-1 EN60598-2-2 ; CEI 76-10 EN62471:2008, EN60825-1


Lamp details

Lamp	LED
Type	CLU028-1204
CRI	>80
CCT	3000 K
Luminous flux	1440lm
Power	9,4W
IEE	A++

All values refer to a single recessed light (spotlight).



Description: Fixture made from epoxy powder coated steel and equipped with two drivers. Suitable for housing two recessed lights provided with a high efficiency LED light source with nominal flux 1440 lm (3000 K). Electrical cable length 390 cm included. Its degree of protection against the penetration of dust, solid objects and liquids is IP43.

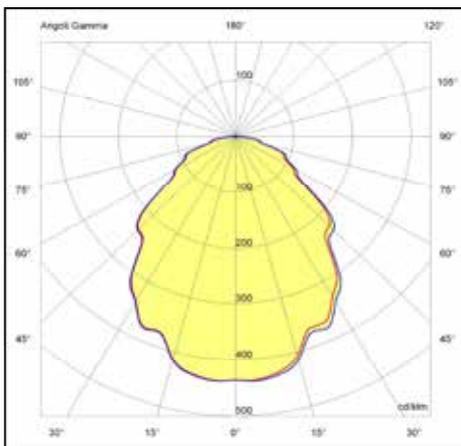

Luminaire details

Supply voltage	220-240V 50-60Hz
Driver 280mA	included
Insulation class	CL I
IP number	IP43
Glow wire	850° C
Impact test	IK03
European standards	EN60598-2-1 EN60598-2-2 ; CEI 76-10 EN62471:2008, EN60825-1


Lamp details

Lamp	LED
Type	CLU028-1204
CRI	>80
CCT	3000 K
Luminous flux	1440lm
Power	9,4W
IEE	A++

All values refer to a single recessed light (spotlight).



Description: Fixture complete with a high efficiency LED light source with a nominal luminous flux of 2200 lm (3000 K). Structure made from steel. Recessed light made from epoxy polyester powder coated aluminium and equipped with an opal polycarbonate diffuser and driver. Electrical cable length 390 cm included. Its degree of protection against the penetration of dust, solid objects and liquids is IP40.

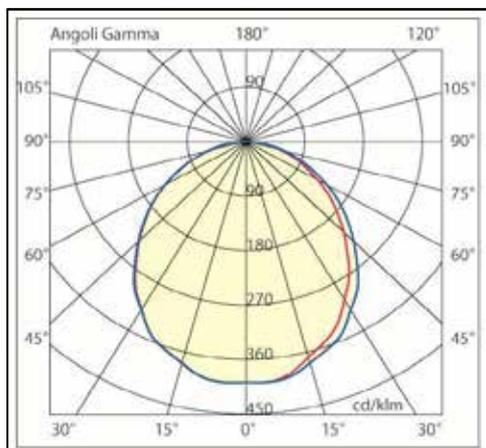

Luminaire details


Supply voltage	220-240V 50-60Hz
Driver 700mA	included
Insulation class	CL I
IP number	IP40
Glow wire	850°C
Impact test	n.d
European standards	EN60598-2-1 EN62471:2008, EN60825-1

Lamp details

Lamp	LED
Type	VS557998
CRI	>80
CCT	3000 K
Luminous flux	2200lm
Power	17,4W
IEE	A++



Description: Fixture complete with a high efficiency LED light source with a nominal luminous flux of 3300 lm (3000 K). Structure made from steel. Recessed light made from epoxy polyester powder coated aluminium and equipped with an opal polycarbonate diffuser and driver. Electrical cable length 390 cm included. Its degree of protection against the penetration of dust, solid objects and liquids is IP40.

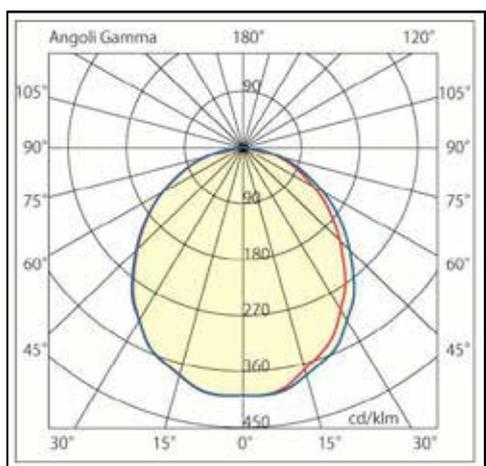

Luminaire details

Supply voltage	220-240V 50-60Hz
Driver 700mA	included
Insulation class	CL I
IP number	IP40
Glow wire	850°C
Impact test	n.d
European standards	EN60598-2-1 EN62471:2008, EN60825-1

Lamp details

Lamp	LED
Type	VS557998
CRI	>80
CCT	3000 K
Luminous flux	3300lm
Power	26,1W
IEE	A++



Deze informatie is afkomstig van de website van Zero-Z design / Akoestiekexpert.nl.

Voor vragen, toelichting en meer informatie kunt u contact opnemen met:

Zero-Z design

Jasmijnstraat 6a

3732 EC De Bilt

T +31 (0)30 2201297

F +31 (0)30 2210692

E info@zero-z-design.nl

W www.zero-z-design.nl

www.akoestiekexpert.nl

